

## Satcom & Antenna Technologies Division



### Overview

The CPI Satcom & Antenna Technologies Inc. (CPI SAT) innovative ManPak®T line leads the way in the next generation of flyaway terminals. Available in 60cm to 1.0m reflector sizes, this tripod antenna line features simple manual or automated satellite acquisition; an intuitive GUI; and a range of optional extra features.

ManPak®T is lightweight, and IATA compliant allowing for ease of transportation. The completely waterproof and rugged design allows for operation in even the most challenging of conditions, be that in a war zone for military communications; capturing breaking news stories from the front line; or distributing CCTV from remote locations on international borders.

### FEATURES

- Simple manual or automated satellite acquisition
- Waterproof and rugged design for harsh environments
- Intuitive GUI and setup time of less than 5 minutes
- Lightweight, and IATA compliant for easy transportation in 1-2 cases
- High performance carbon fiber segmented antenna
- Assisted, fast acquisition via intuitive GUI (C060FA)
- Lightweight, IATA compliant
- Packs into one case (two cases for the C060FA)
- Ka, Ku & X-band
- Set up time less than 5 minutes
- ITAR free
- C060FA includes a clip-on auto pointing pack
- Interchangeable feed system for swapping frequency bands nn Range of integrated BUC/SSPB and LNB options available
- Common mount for C060 and C100
- Optional auto-pointing kit can be easily retro fitted or and sizes swapped between antennas and sizes

### BENEFITS:

- Lightweight
- Manual or automated

### APPLICATIONS:

- Designed for operation in the most challenging of conditions

## C060FA User Interfaces

- AC Power Input – 85 to 264 VAC, 47-63 Hz
- DC Power Input – 11 to 36 VDC
- Ethernet (Weatherproof RJ45)
- RF Monitor (N-Type)
- USB (Weatherproof Type A)

## Control - C060FA

- Single Button Control
- Web Browser Monitor & Control
- Simple highly intuitive interactive Web User interface

## Mechanical/Physical


- **Reflector**  
3 piece segmented Carbon Fibre
- **Surface Accuracy**  
Better than 0.25mm rms error
- **Antenna Weight**  
57 lbs. (26 kg) including transit case
- **Packaging**  
Single IATA compliant cases
- **C060FA Auto Upgrade Kit Weight**  
35.2 lbs. (16 kg) including transit case

## Alignment - C060FA

The optional auto pointing kit supplied with the C060FA simply clips onto the antenna and provides an upgrade to fully automatic pointing capabilities. The powerful on board controller allows for highly intuitive, single button control or a graphical user interface experience via a Web UI to deskill the operation of locating and acquiring the desired satellite. The system utilizes the built in GPS, compass and inclinometer sensors in combination with information obtained from the optional beacon receiver and DVB receiver or attached MODEM, to provide data to the controller to enable automatic satellite pointing and peaking.

## Environmental

- **Temperature (Tested to MIL-STD-810G CHG-1 501.6 & 502.6 Proc I & II)**  
Operational: -20°C to 49°C (-5°F to 120°F)  
Storage: -45°C to 70°C (-50°F to 160°F)
- **Humidity (Tested to MIL-STD-810G CHG-1 507.6 Proc II)**  
Operational: 95% Relative Humidity
- **Altitude (Tested to MIL-STD-810G CHG-1 500.6 Proc I & II)**  
Operational: 3,000m @ -10°C (9,842ft @ 14°F)  
Storage: 5,000m @ -30°C (16,404ft @ -22°F)
- **Vibration (storage/transit) (Tested to MIL-STD-810G CHG-1 514.7 Proc I)**  
Cat. 24 MIT: 0.04 g<sup>2</sup>/Hz, 20 Hz to 2,000 Hz, 1hr/axis, rms=7.7g's
- **Sand & Dust Ingress (Tested to MIL-STD-810G CHG-1 510.6 Proc I)**  
Dust: 10.6g/m<sup>3</sup>, 9m/s @ 49°C  
Sand: 1.1g/m<sup>3</sup>, 18m/s @ 49°C
- **Solar Radiation (Tested to MIL-STD-810G CHG-1 505.6 Proc I)**  
Operational: 1120W/m<sup>2</sup> @ 49°C  
(355BTU/ft<sup>2</sup>/hr @ 120°F)
- **Ice/Freezing Rain (Tested to MIL-STD-810G CHG-1 521.4 Proc I)**  
25.4mm (1") Ice buildup, de-ice before use
- **Corrosion / Salt Fog (Tested to MIL-STD-810G CHG-1 509.6)**
- **Wind Loading**  
Operational: 30mph with gust to 45mph (with ballast)

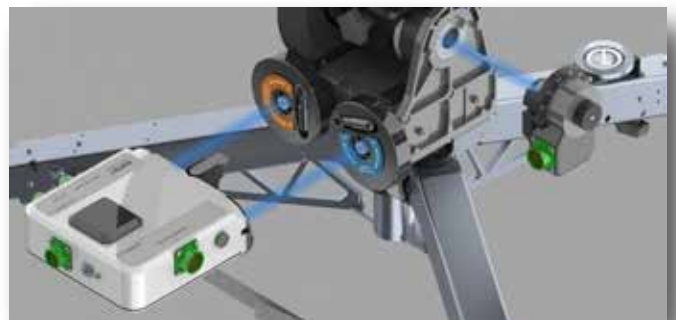

# CPI ManPak<sup>®</sup>T C060FM, C060FA

Electrical	Ka-Band	Ku-Band	X-Band
Frequency (GHz)	Transmit: 29.5 to 30.0 Receive: 19.2 to 20.2	Transmit: 13.75 to 14.5 Receive: 10.95 to 12.75	Transmit: 7.9 to 8.4 Receive: 7.25 to 7.75
Polarization	Circular	Linear	Circular
Tx Gain	42.3 dBi	36.2 dBi	31.8 dBi
Rx Gain	38.3 dBi	34.6 dBi	30.4 dBi
G/T	G/T@19.7 GHz = 15.2 dBk	G/T@11.5 GHz = 14.4 dBk	G/T @ 7.4 GHz = 9.7 dBk

**Contact us at [CustomerCareSAT@cpii.com](mailto:CustomerCareSAT@cpii.com) or  
call us at +1 770-689-2040.**

The data should be used for basic information only.  
Formal, controlled specifications may be  
obtained from CPI for use in equipment design.



**Satcom & Antenna  
Technologies Division**  
1700 NE Cable Drive  
Conover, NC  
USA 28613

tel +1 770-689-2040  
+1 888-874-7646 (In North America)  
+1 619-240-8480 (Outside North America)  
email [CustomerCareSAT@cpii.com](mailto:CustomerCareSAT@cpii.com)  
web [www.cpii.com](http://www.cpii.com)

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.