


Communications & Power Industries TR Limiter

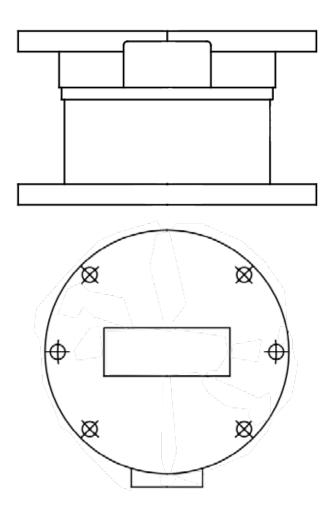

With a history of producing high quality products, we can help you with your limiter.

Contact us at ElectronDevices@cpii.com or call us at +1 978-922-6000.

FEATURES:

- Frequnecy range: 5.4 5.9 GHz
- Peak power: 3 kW normal/100 kW fault
- Duty cycle: .001
- Pulsewidth: 3.0 µSec
- Operating temperature: -10° to +71° C
- Input waveguide: 15 psig
- Mounting: mates to WR187 W/G
- Radioactive gas: 25 mCi of H3 solid

APPLICATIONS:

• Weather radars



Beverly Microwave Division 150 Sohier Road Beverly, Massachusetts web www.cpii.com USA 01915

tel +1 978-922-6000 email BMDMarketing@cpii.com fax +1 978-922-8914 For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2022 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI. 9/22