
Communications & Power Industries Receiver Protector



With a history of producing high quality products, we can help your with receiver protector.

Contact us at BMDMarketing@cpii.com or at call us at +1 978-922-6000.

FEATURES:

- All solid state
- 0 to 50 dB continuously variable attenuator
- May be supplied in phase and amplitude matched sets

BENEFITS:

- World's largest manufacturer of receiver protectors
- State of the art facility with high level of vertical integration
- Extensive high power test capabilty
- In-house environmental test facility
- Computer modeling and automatic test capabilities

APPLICATIONS:

- Missile seekers
- Airborne radars
- Unmanned Aerial Vehicles (UAV)
- Ground based systems
- Naval radars
- Air traffic control radars
- Weather radars



CPI X-Band 10 kW Solid State Receiver Protector: VDX1837

Electrical Specifications


Operating frequency	9.1 – 9.4 GHz
Maximum overload power	10 kW peak
Maximum pulsewidth	0.5 μSec
Maximum duty cycle	0.001
Maximum insertion loss	1.0 dB
Maximum VSWR	1.3:1
Maximum spike leakage power	1.0 W
Maximum flat leakage power	100 mW
Maximum recovery time (-3dB)	1.0 μSec
Continuously variable attenuation*	0 to 50 dB


Attenuator control (analog) 40 to 2500 µA

Note: See product specification for details regarding attenuator function, tolerances, etc.

Mechanical and Environmental **Specifications**

RF input	WR90
RF output	WR90
Attenuation control	SMA(F)
Dimensions	See outline drawing
Operating temperature	-40° to +71° C
Storage temperature	-54° to +71° C
Altitude	15,000 ft max
Relative humidity	95% max

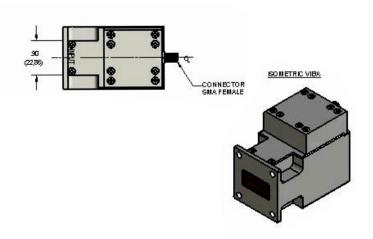

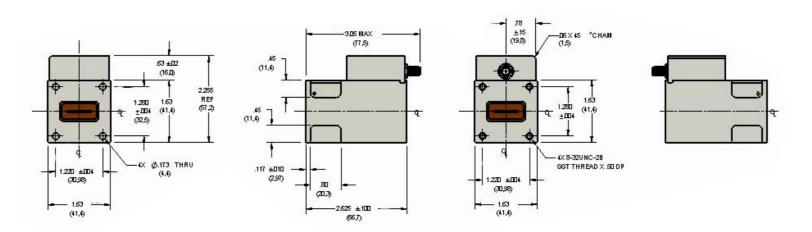



Beverly Microwave Division

150 Sohier Road Beverly, Massachusetts web USA 01915

tel fax

+1 978-922-6000 +1 978-922-8914 www.cpii.com

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. email BMDMarketing@cpii.com Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.