

Communications & Power Industries Helix Traveling Wave Tube



Custom configurations are also available. These variations in the performance and configuration include:

- mechanical configurations
- electrical and RF connections
- dual-stage depressed collector

FEATURES:

- 125 W
- 13.75 - 14.5 GHz
- PPM focused
- Coaxial input
- WR 75 output
- Conduction cooled

APPLICATIONS:

- XXXXXXXXXXXXXXXX

	Frequency (GHz)	Power output (min)
VTU-6125C4	13.75 - 14.5	125 W


With a history of producing high quality products, we can help you with your Helix TWT.

Contact us at MPPMarketing@cpii.com or call us at +1 650-846-2800.

Typical Operating Parameters

	Minimum	Maximum	Typical	Units
Heater voltage	5.7	6.3	6.0	Vdc
Heater surge current	---	5.0	---	A
Helix voltage	4.8	5.2	5.0	kVdc
Helix current	---	12.0	---	mAdc
Collector voltage	4.2	5.0	---	kVdc
Cathode current	170	220	---	mAdc
Heater warm-up time	3.0	---	---	minutes
Drive power	---	100	---	mW
Prime power	---	500	450	W
Load VSWR	---	2.0:1	---	VSWR

CPI CW Helix Traveling Wave Tube: VTU-6125C4

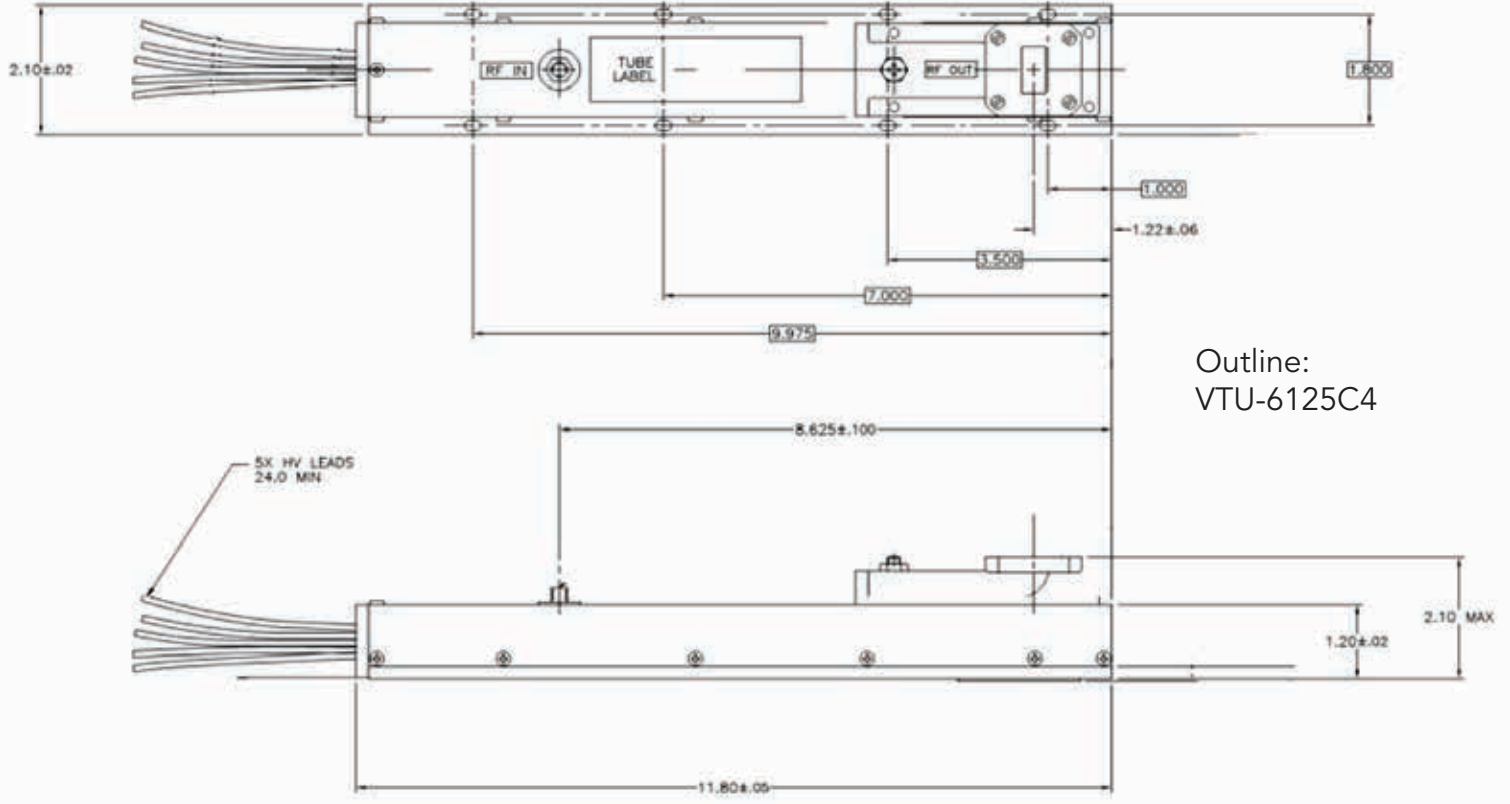

Outline:
VTU-6125C4

The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.



**Microwave Power
Products Division**
811 Hansen Way
Palo Alto, California
USA 94304

tel +1 650-846-2800
email MPPMarketing@cpii.com
web www.cpii.com/MPP

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary; use and reproduction is strictly prohibited without written authorization from CPI.